




ANNEXE TECHNIQUE - DIMENSIONS AVK VANNES À OPERCULE

APP. 4


DIMENSIONS FACE-À-FACE:

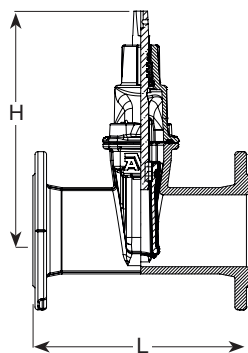

DN	Vannes suivant EN 1074-1 & 2, type A (DIN 3352 partie 4)			Vannes suivant EN 1074-1 & 2, type B (BS 5163)		
	Dim. face-à-face EN 558-F14 (DIN3202 pt. 1, F4) L mm	Dim. face-à-face EN 558-F15 (DIN3202 pt. 1, F5) L mm	Hauteur H mm	Dim. face-à-face EN 558-F3 L mm	Hauteur H mm	
25	-	120	180	-	-	
32	-	140	190	-	-	
40	140	240	241	-	-	
50	150	250	241	178	279	
65	170	270	271	190	279	
80	180	280	297	203	294	
100	190	300	334	229	324	
125	200	325	376	254	324	
150	210	350	448	267	429	
200	230	400	562	292	531	
250	250	450	664	330	614	
300	270	500	740	356	690	
350	290	550	940/930	381	867	
400	310	600	940/960	406	867	
450	330	650	951*/1170**/1130***	-	-	
500	350	700	951*/1140**/1130***	-	-	
600	390	-	- /1280**/1270***	-	-	
700	430	-	1622	-	-	
800	470	1000	1672**/1591***	-	-	
900	510	-	2118	-	-	
1000	550	-	2067	-	-	

* Séries 02 ** Séries 06 *** Séries 55

TIGE DE MANŒUVRE:

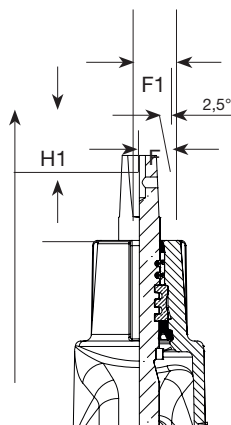

DN	Robinetts de voirie				Vannes suivant EN 1074-1 & 2, type A (DIN 3352 partie 4)			Vannes suivant EN 1074-1 & 2, type B (BS 5163)		
	H mm	H1 mm	F mm	F1 mm	H1 mm	F mm	F1 mm	H1 mm	F mm	F1 mm
25	180	35	12.3	15.4	-	-	-	-	-	-
32	190	35	12.3	15.4	-	-	-	-	-	-
40	203	35	12.3	15.4	29	14	16.6	-	-	-
50	213	35	12.3	15.4	29	14	16.6	38	19	22.4
65	-	-	-	-	34	17	20.0	38	19	22.4
80	-	-	-	-	34	17	20.0	38	19	22.4
100	-	-	-	-	38	19	22.4	38	19	22.4
125	-	-	-	-	38	19	22.4	38	19	22.4
150	-	-	-	-	38	19	22.4	42	24	27.7
200	-	-	-	-	42	24	27.7	47	27	31.2
250	-	-	-	-	47	27	31.2	47	27	31.2
300	-	-	-	-	47	27	31.2	47	27	31.2
350	-	-	-	-	55	32	36.9	55	32	36.9
400	-	-	-	-	55	32	36.9	55	32	36.9
450*	-	-	-	-	55	32	36.9	-	-	-
500*	-	-	-	-	55	32	36.9	-	-	-
450**	-	-	-	-	84	ø40	ø40	-	-	-
500**	-	-	-	-	84	ø40	ø40	-	-	-
600**	-	-	-	-	83.5	ø40	ø40	-	-	-
700	-	-	-	-	83.5	ø30/40	ø30/40	-	-	-
800	-	-	-	-	83.5	ø40	ø40	-	-	-
900	-	-	-	-	83.5	ø40	ø40	-	-	-
1000	-	-	-	-	83.5	ø40	ø40	-	-	-

* séries 02 et 20 ** pour séries 55/30-ø30 pour séries 06