




BOULONS POUR CONNEXIONS À BRIDES

Références et dimensions

DN	PN	Boulon (nombre x M* x L**)	Ecrou (nombre x M*)	Rondelle (nombre x D1*** x D2*** x t)
50/65	10/16	4 x M16x65	4 x M16	8 x 17x30x3
80/100/125	10/16	8 x M16x65	8 x M16	16 x 17x30x3
150	10/16	8 x M20x70	8 x M20	16 x 21x37x3
200	10	8 x M20x75	8 x M20	16 x 21x37x3
200	16	12 x M20x75	12 x M20	24 x 21x37x3
250	10	12 x M20x75	12 x M20	24 x 21x37x3
250	16	12 x M24x80	12 x M24	24 x 25x44x4
300	10	12 x M20x85	12 x M20	24 x 21x37x3
300	16	12 x M24x85	12 x M24	24 x 25x44x4
350	10	16 x M20x90	16 x M20	32 x 21x37x3
350	16	16 x M24x95	16 x M24	32 x 25x44x4
400	10	16 x M24x100	16 x M24	32 x 25x44x4
400	16	16 x M27x100	16 x M27	32 x 28x50x4
450	10	20 x M24x100	20 x M24	40 x 25x44x4
450	16	20 x M27x100	20 x M27	40 x 28x50x4
500	10	20 x M24x110	20 x M24	40 x 25x44x4
500	16	20 x M30x110	20 x M30	40 x 31x56x4
600	10	20 x M27x120	20 x M27	40 x 28x50x4
600	16	20 x M33x120	20 x M33	40 x 34x68x4

*Taille **Longuer ***Diamètre intérieur **** Diamètre extérieur

Forages de brides standard: suivant ISO 7005 partie 2 (EN1092-2: 1997, DIN 2501):

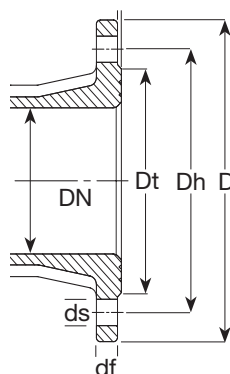

DN	D mm	Dt mm	Dh mm	df mm	dr mm	ds mm	Nombre de trous		Tailles des boulons	
	PN10	PN16	PN10	PN16	PN10	PN16	PN10	PN16	PN10	PN16
40	150	83	110	16	3	19	4		M16	
50	165	102	125	16	3	19	4		M16	
65	185	122	145	16	3	19	4		M16	
80	200	138	160	16	3	19	8		M16	
100	220	158	180	16	3	19	8		M16	
125	250	188	210	16	3	19	8		M16	
150	285	212	240	16	3	23	8		M20	
200	340	268	295	17	3	23	8	12	M20	
250	400	320	350	19	3	23	12	12	M20	M24
300	455	370	400	21	4	23	12	12	M20	M24
350	520	430	460	23	4	23	16	16	M20	M24
400	580	482	515	28	4	28	16	16	M24	M27
450	640	535	565	28	4	28	20	20	M24	M27
500	715	590	620	28	4	28	20	20	M24	M30
600	840	685/725*	725	29	5	34	20	20	M27	M33
700	895	-	794	33	5	31	24	-	M27	-
800	1015	-	901	35	5	34	24	-	M30	-
900	1115	1125	1001	38	5	34	28	28	M30	M36
1000	1230	1255	1112	40	5	37	28	28	M33	M39

* series 55/30 / series 06